


Drawing not to be scaled. Dimensions indicated must be checked on site. Any discrepancy should be reported immediately.

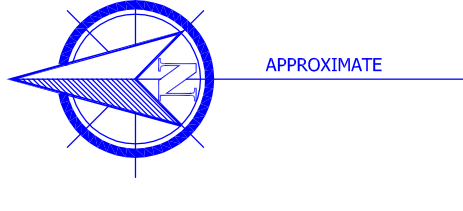

NOTES
Local site datum value 20.000m taken on Station 2 (Kerb stone to the northern entrance)

ABBREVIATIONS

- B Barbed
- BB Bottom of Bank
- BT British Telecom
- CATV Cable Communications Cover
- CC Coal Chute
- CCM Coal Communications
- CH Electricity
- CI Gas Valve
- G7 Gas Valve
- IC Inspector Cover
- LP Lamp Post
- MH Manhole
- MM Mercury Communications
- P Post
- RE Rodding Eye
- RS Road Sign
- RWP Rain Water Pipe
- SNP Soil Vent Pipe
- S/P Tree
- T Top of Bank
- TP Telegraph Pole
- U Unidentified
- ULI Unable to Lift
- U Utility
- WV Water Valve
- BM, LK Beam Level
- CLM Column Level
- FLM Floor Level
- HLLM Head Level
- LK Level
- SPG LK Spot Level
- SPG UL Springing Level
- WLM Wall Level

Survey Station Description

- Sn 1 300mm Timber Peg
- Sn 2 Survey Nail
- Sn 3 300mm Timber Peg
- Sn 4 Survey Nail
- Sn 5 Survey Nail
- Sn 6 300mm Timber Peg
- Sn 7 Survey Nail
- Sn 8 Survey Nail

Rev.	Date	Description


Client: _____

Site Address: _____

LRM Survey Services

T: 0793 741997 E: lrm-surveys@btinternet.com

Title	Date	Scale	Surveyed	Drawn

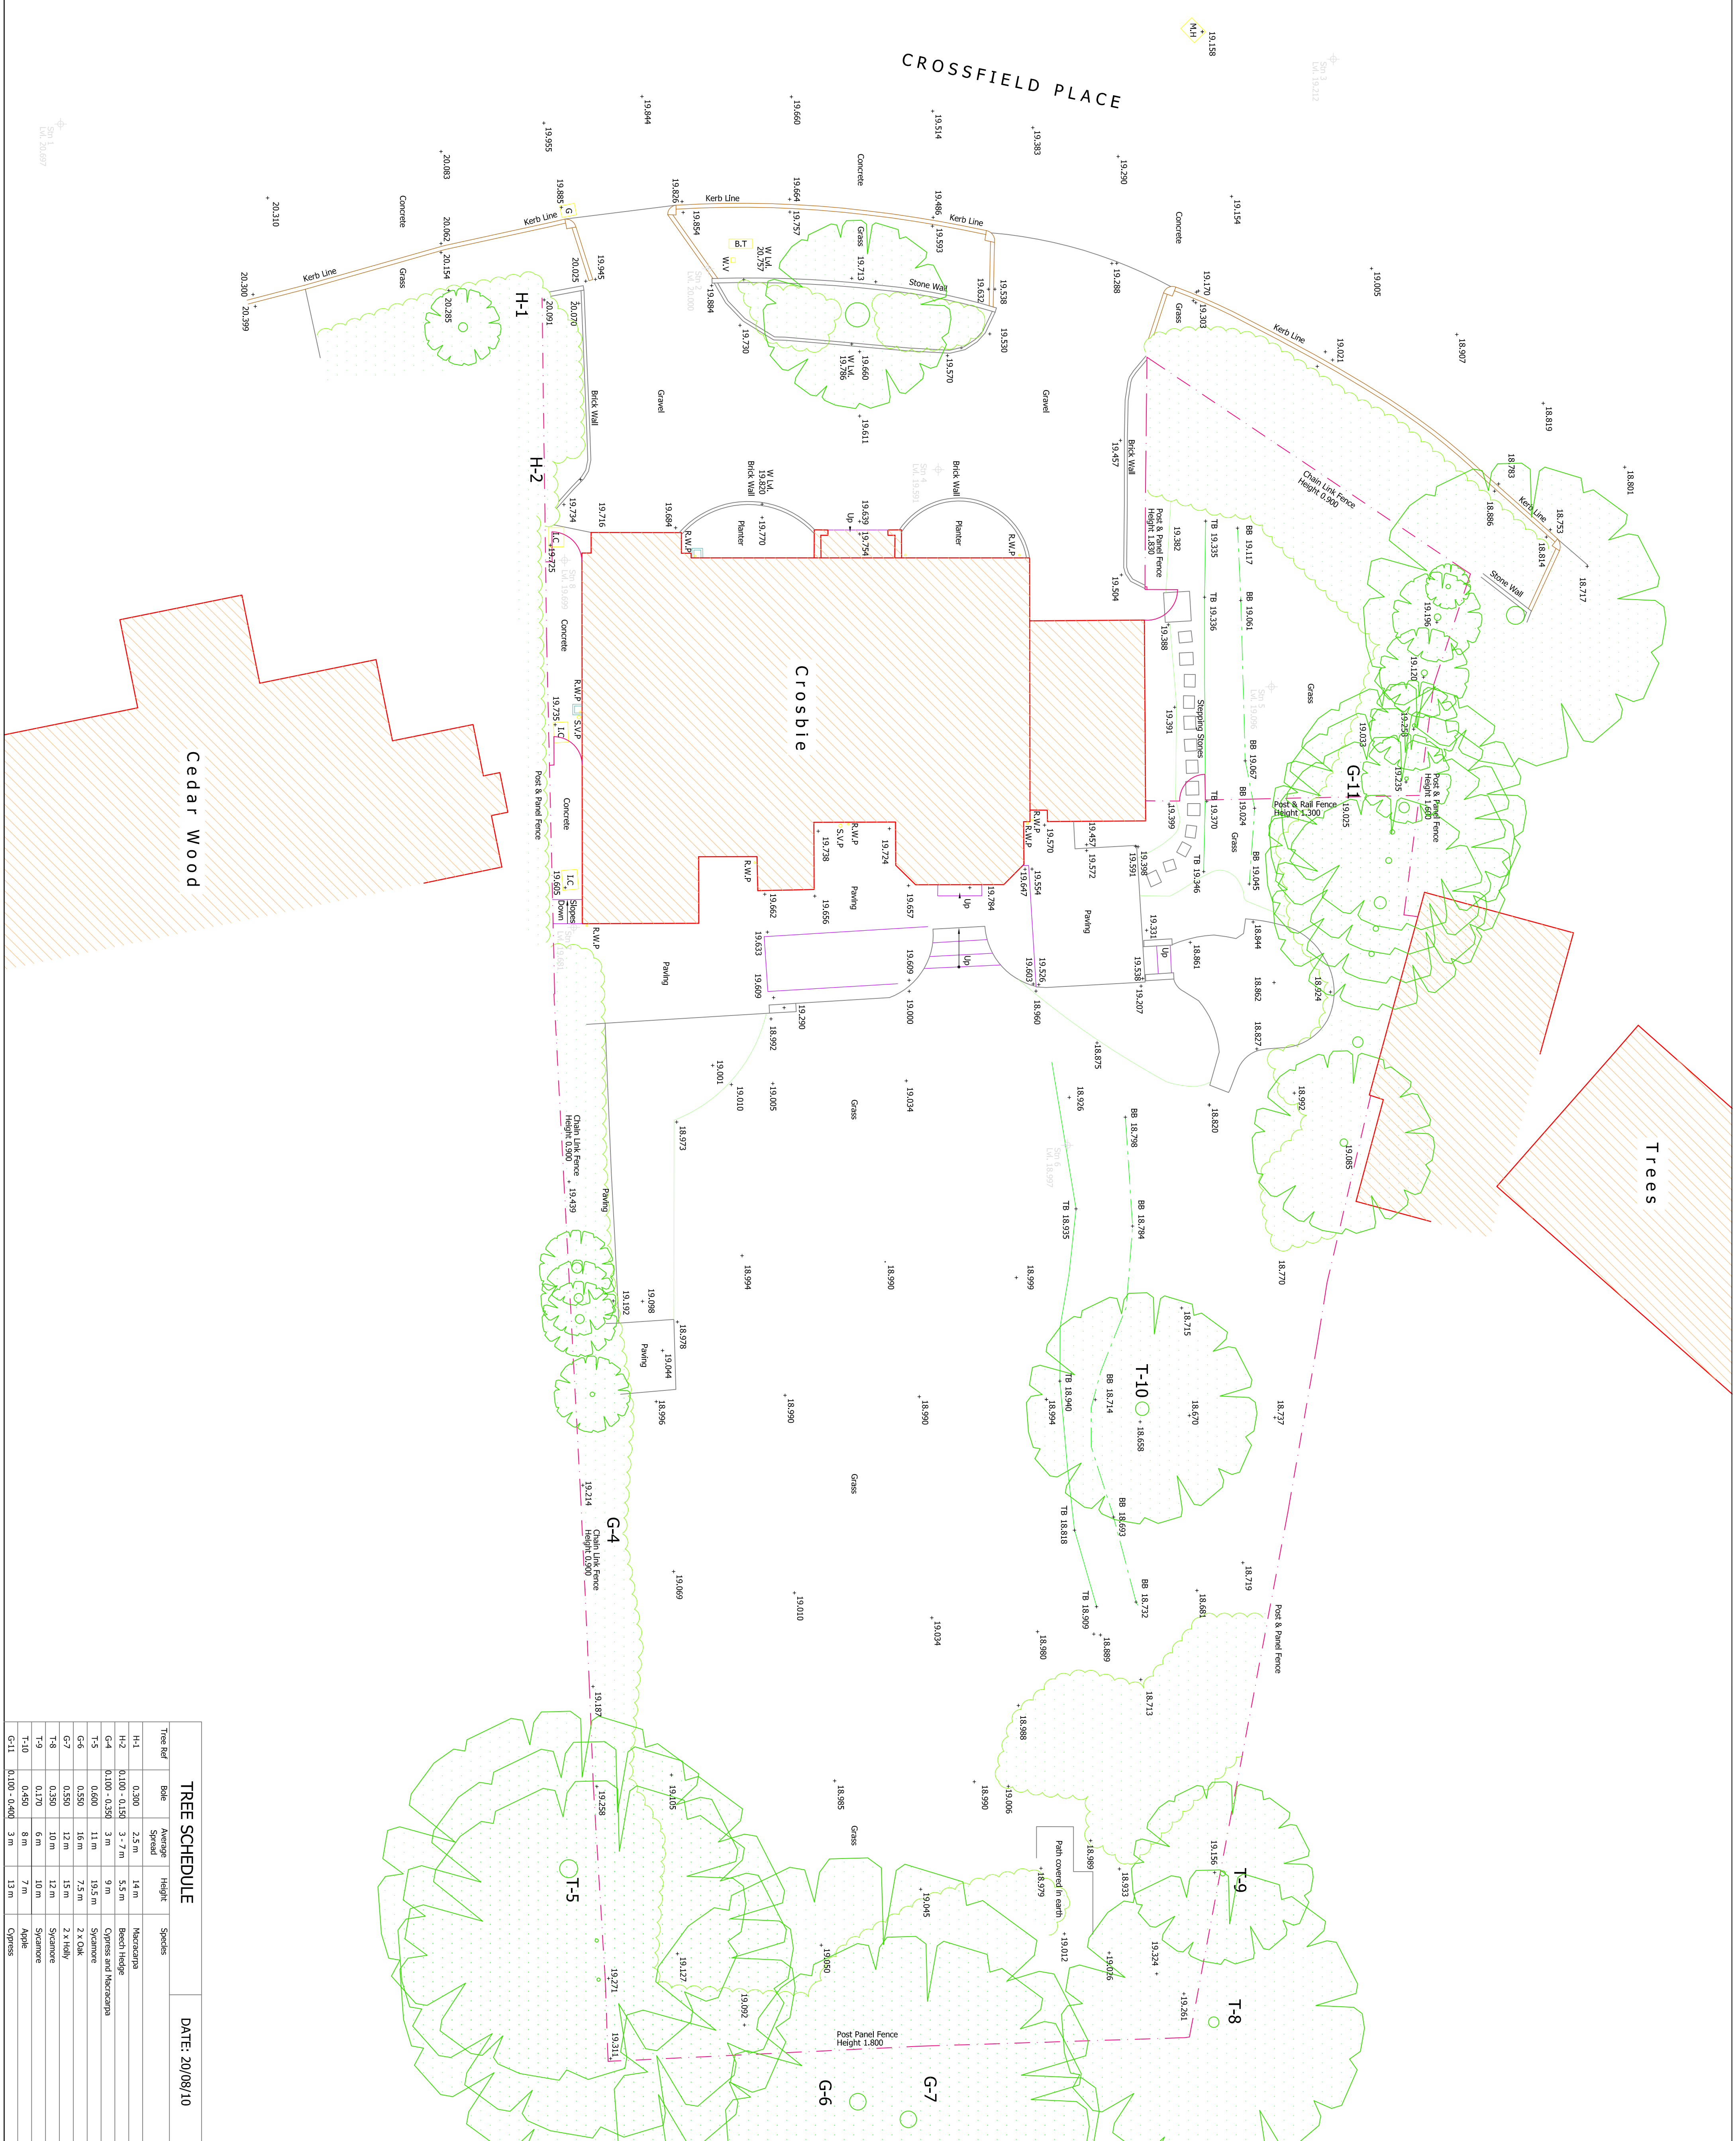

TREE SCHEDULE				DATE: 20/08/10
Tree Ref	Bore	Average Spread	Height	Species
H-1	0.300	2.5 m	14 m	Hydrangea
H-2	0.100 - 0.150	3.7 m	5.5 m	Beech Hedge
G-4	0.100 - 0.350	3 m	9 m	Opens and Hydrangea
T-3	0.600	11 m	19.5 m	Spireane
G-6	0.550	16 m	7.5 m	2 X Oak
G-7	0.550	12 m	15 m	2 X Holly
T-8	0.350	10 m	12 m	Spireane
T-9	0.170	6 m	10 m	Spireane
T-10	0.450	8 m	7 m	Apple
G-11	0.100 - 0.400	3 m	13 m	Opens